3450 W. 131st. Street Carmel, IN 46074 317-733-2855 Fax: 317-733-2053

### CITY OF CARMEL - WATER DISTRIBUTION DEPARTMENT

### SPECIFICATIONS 11/2"- 2" OUTSIDE METER PIT SET

#### **REVISED 8/2017**

METER PIT COVER. 20x36 STD METER BOX COVER.

VESTAL ADAPTER RING WITH MC1 WITH 7" FRAME FORD MC-36-T MONITOR COVER (ALL WITH HOLE IN LID)

2. COPPER SETTERS

FORD: 11/2"- SINGLE LID PLASTIC PIT SETTER (PMBHH-688-36-40-NL)

2"- SINGLE LID PLASTIC PIT SETTER (PMBHH-788-36-40-NL)

MUELLER: 11/2"- EZ-VAULT METER SETTERS (500VS3636FFB000652N)
2"- EZ-VAULT METER SETTERS (550VS3636FFB000653N)

AY McDONALD: 11/2"- PIT SETTER 780-648 NL


2"- PIT SETTER 780-748 NL


- 3. SERVICE LINE. ALL 11/2" AND 2" SERVICE LINES MUST BE COPPER OUT OF CURB STOP AT LEAST 2 FEET.
- BALL TYPE CURB STOP. MUST HAVE COMPRESSION TYPE FITTINGS ON BOTH ENDS AND BE SUPPORTED BY A CONCRETE BLOCK. Mueller- 25155-3, Ford- 11/2" B44-666 2" B44-777.
- 5 SERVICE BOX with SERVICE BOX ROD. DEPTH OF BURY WILL VARY.
- 6. CORPORATION STOP. CORPORATION STOP SHOULD BE TAPPED DIRECTLY TO THE WATER MAIN AT THE HORIZONAL POSITION 3 O'CLOCK. 11/2" 2" DUCTAL IRON or PLASTIC- repair clamp with Threaded 11/2" or 2". SMITH-BLAIR # 238 FULL CIRCLE REPAIR CLAMP SINGLE BAND.


#### **NOTES**


## YOU WILL HAVE TO PRE-ORDER THESE PITS THRU YOUR LOCAL DISTRUBITOR (4 TO 6 WEEKS)


- Service lines require compression couplings only.
- 2. No meter pit shall be installed in a traffic area, driveway, or side walk.
- There shall be no buried joints or couplings, except for the corporation stop on the Main and the curb stop valve.
- Care should be taken when establishing final grade. The meter pit cover is
   Expected to be at grade. Using bricks or blocks to raise the meter pit cover will not be accepted. (METER FROM TOP OF THE LID SHOULD BE NO DEEPER THAN 20")
- 5. Any questions should be directed to the: Carmel Water Distribution Department at 317-733-2855.

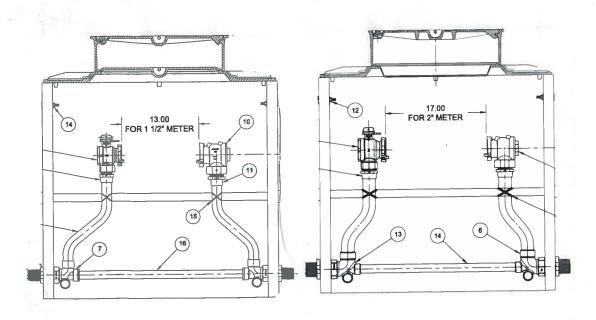

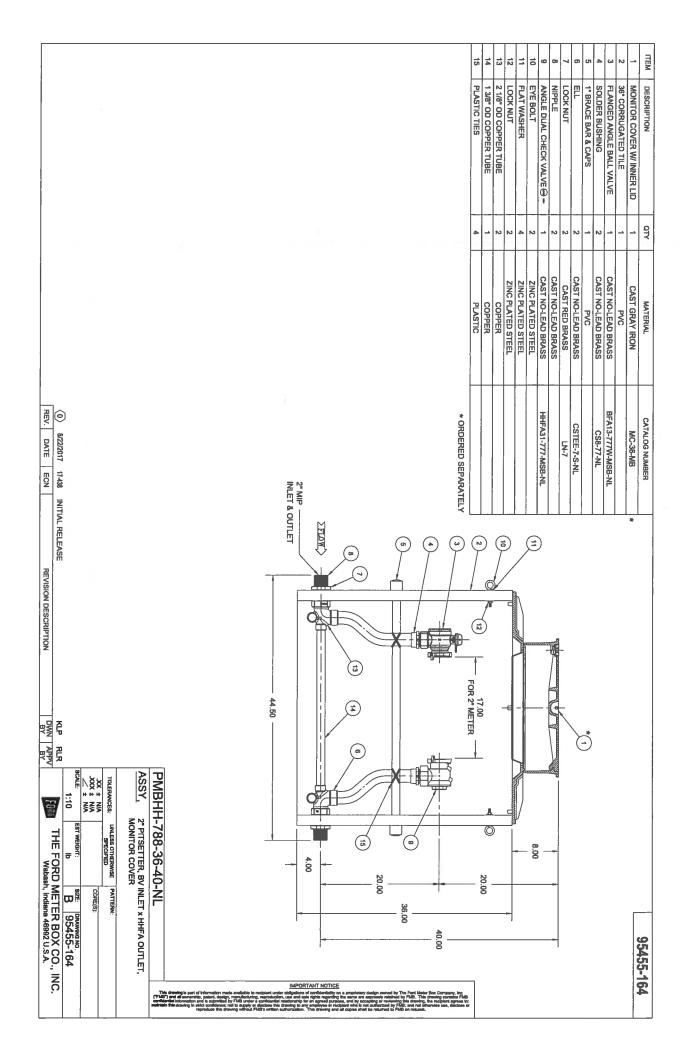

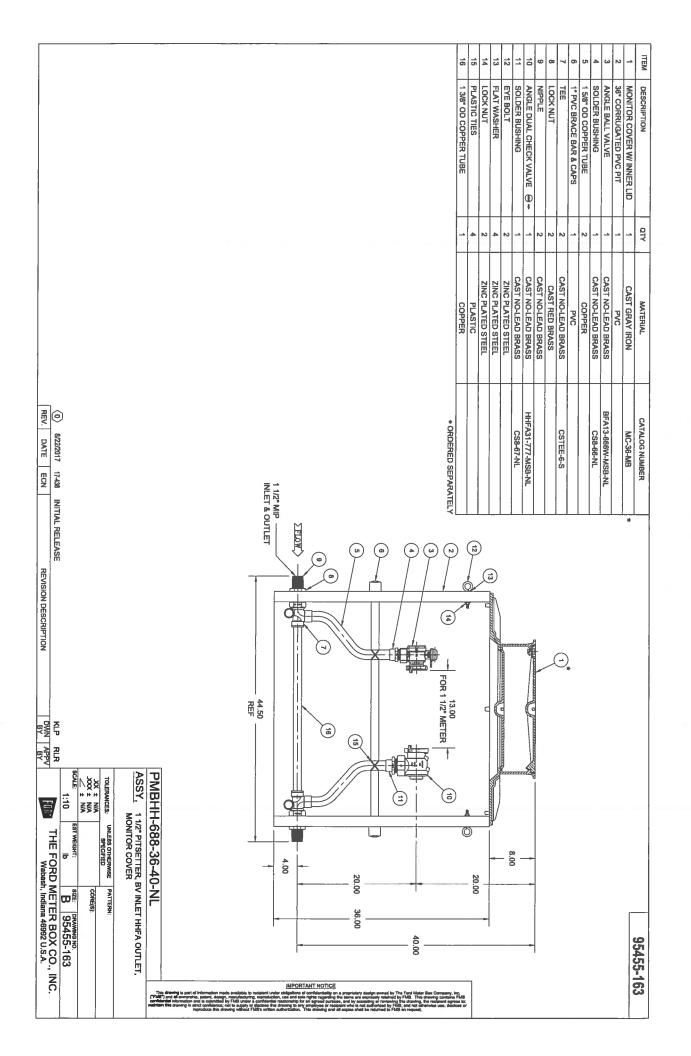

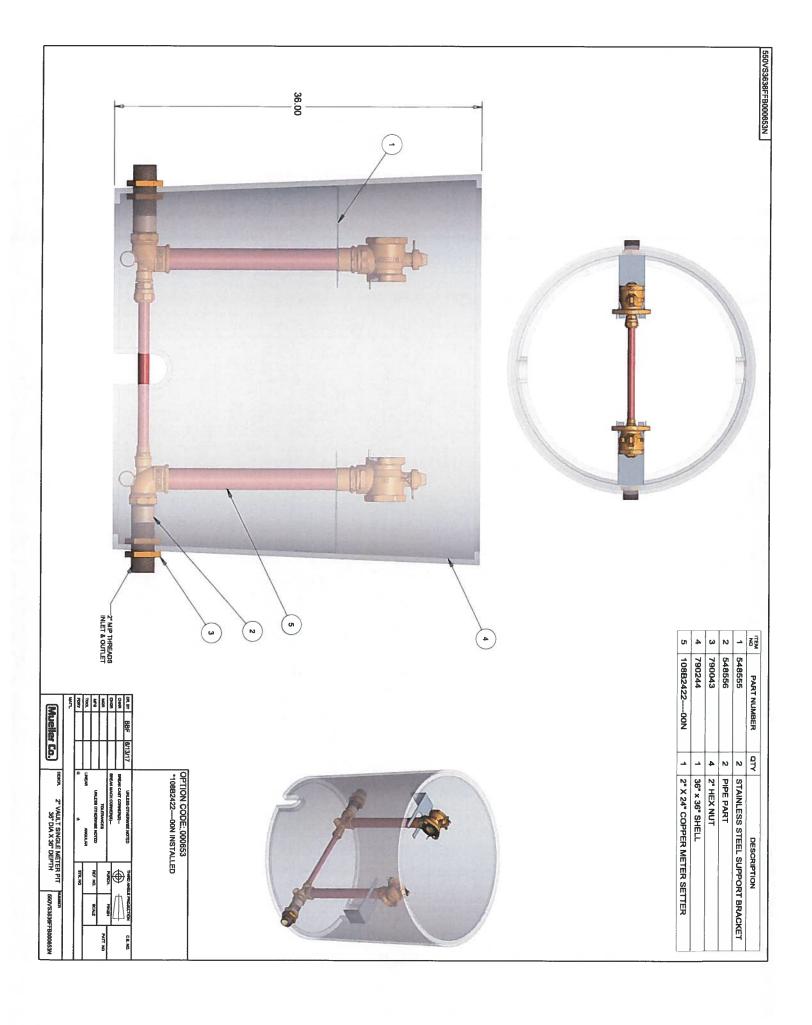

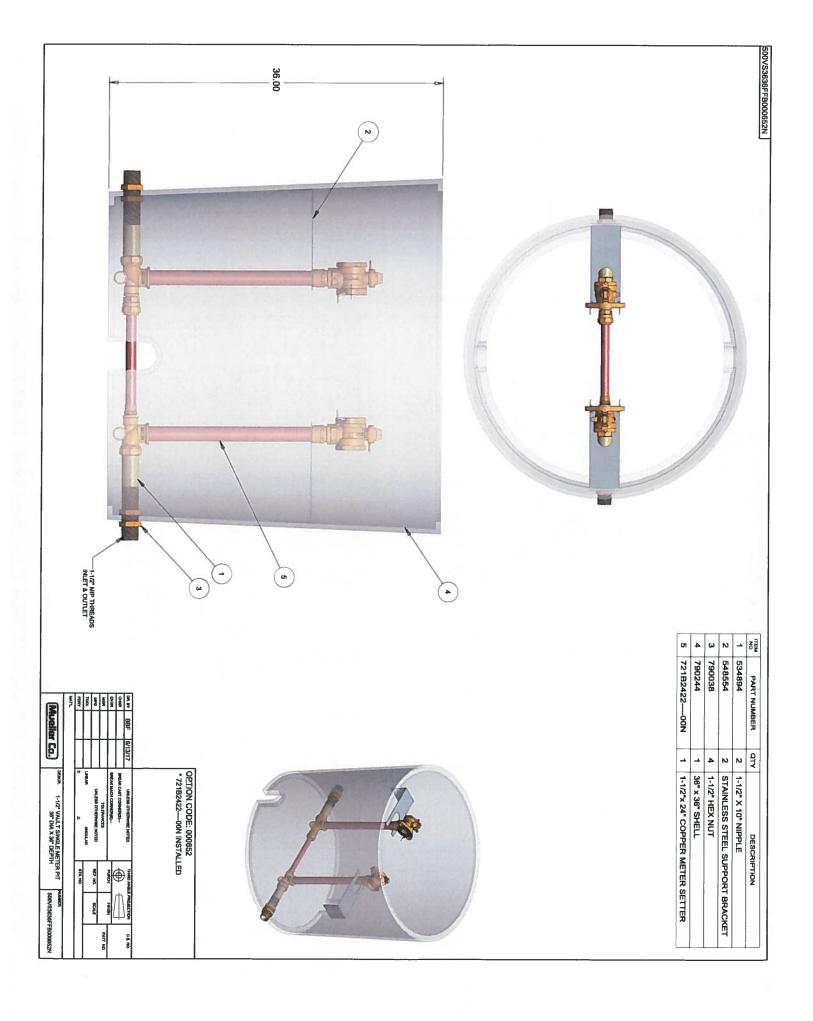


# SUBMITTAL DATA SHEET

## NL Pit Setter - 780-648WWPP 660X36



MNPT x MNPT

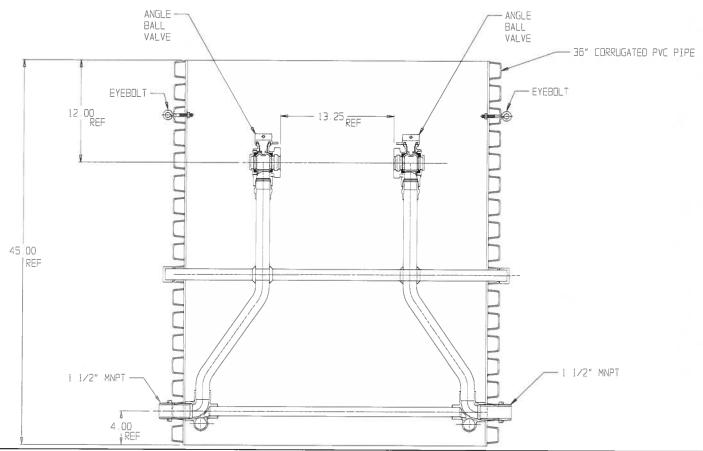

### **SUBMITTAL INFORMATION**

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5 (latest revision)
- Copper tubing made in compliance with ASTM B75 or B88, UNS C12200 (latest revision)
- Lead free solder joints
- Heavy wall PVC shell
- Large wrench flats provided for proper installation



A.Y. McDonald Mfg. Co. P.O. Box 508

Dubuque, IA 52004-508

**Toll Free:** 1-800-292-2737

Fax: 1-800-832-9296

Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com


A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

# SUBMITTAL DATA SHEET

## NL Pit Setter - 780-736WWPP 770X36





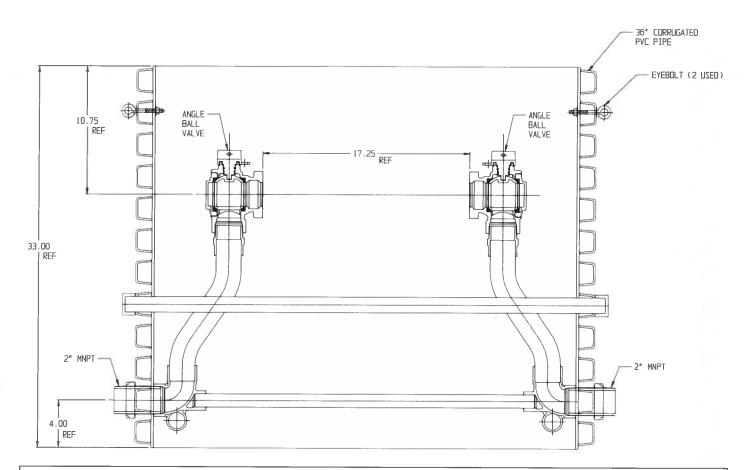

### **SUBMITTAL INFORMATION**

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5 (latest revision)
- Copper tubing made in compliance with ASTM B75 or B88, UNS C12200 (latest revision)
- Lead free solder joints
- Heavy wall PVC shell
- Large wrench flats provided for proper installation



A.Y. McDonald Mfg. Co.

P.O. Box 508

Dubuque, IA 52004-508

Toll Free: 1-800-292-2737

Fax: 1-800-832-9296

Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.