


Carmel Water Utility Residential

Water line responsibility

Carmel Water Utilities is responsible for water service lines from the water main to the meter pit, (**the meter pit, lid, and casting are the homeowners responsibility**), all plumbing from the meter pit to the home is the responsibility of the homeowner, all repairs and associated costs are the homeowner's responsibility. **If there is a curb stop**, all plumbing past the curb stop is the responsibility of the homeowner and all repairs and associated costs are the homeowner's responsibility past the curb stop.

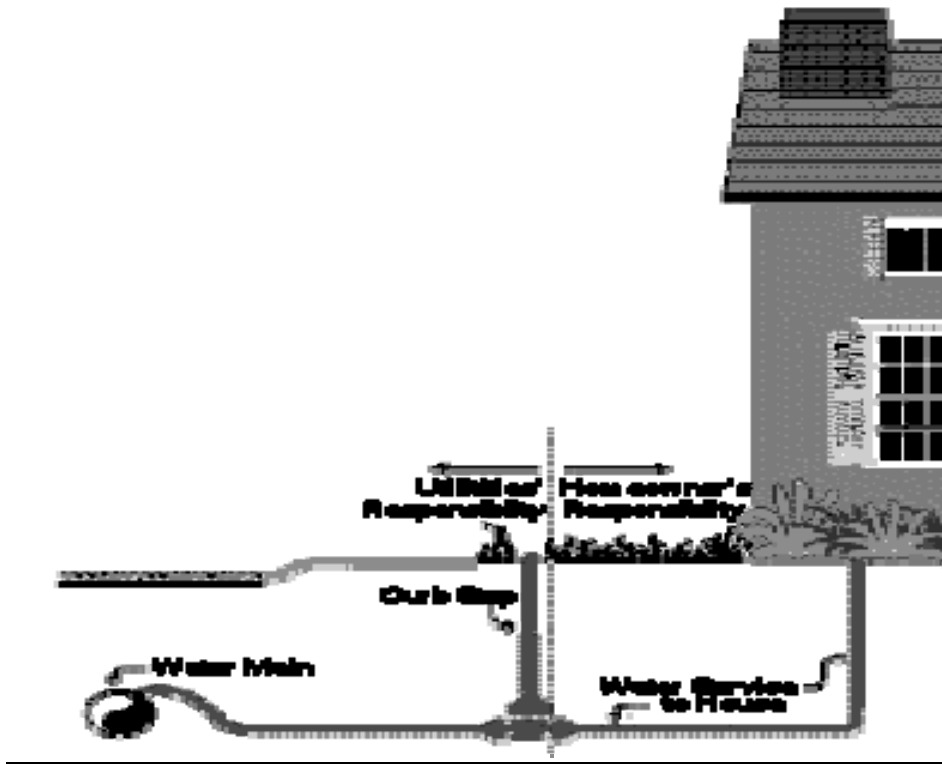

Meter pit or curb stop

***For Water Service and Sewer Lateral Installation: Locate the middle of the Lot and install Water 5' left of that line and Sewer 5' right. A 6' piece of PVC pipe is to be used to mark the water service stub. All service lines are to terminate 8' behind the sidewalk**

*****note*** new construction water service stubs shall extend 8' behind sidewalk and be turned up and left 12" below finish grade**